

Load cell DLRP L002

Features

- Passive load cell 0...10 kN
- Compact dimensions
- For tension and compression
- Protection class IP 67
- Stainless steel



Technical Data


Standard capacities	0...500 N 0...1000 N 0...2000 N 0...5000 N 0...10000 N
Sensitivity at FS	2 mV/V
Combined error	< 0,3% FS
Linearity	< 0,3% FS
Hysteresis	< 0,3% FS
Compensated temperature range	0...+70 °C
Operating temperature range	-20...+70 °C
Storage temperature range	-40...+85 °C
Temperature effect zero	< ±0,02% /K
Temperature effect span	< ±0,03% /K
Zero balance	< ±1% FS
Non-repeatability	< 0,1% FS
Creep error	< 0,15% FS (after 30 min. with FS)
Sensitivity tolerance	< ±1% FS
Bridge resistance	Full bridge 350 Ω
Isolation resistance	> 3 GΩ
Excitation max.	7 V
Signal polarity	bipolar (tension +2 mV/V)
– static load	200% FS
– dynamic load	100% FS
Breaking load	320% FS
Deflection FS	0,05 mm typical
Protection class	IP 67
Cable	5 m, shielded, PUR
Load cell material	1.4542

FS = Full scale output


Combined error contains linearity, hysteresis and non-repeatability

Order Code

DLRP L002.		B		TC/					Option
									C Top cover
									CL10 10 m cable length (5 m standard)
									CCL10 Combinations possible
									Load transmission
									TC Tension/Compression (see drawing)
									Measuring range
									150 0...500 N
									210 0...1000 N
									220 0...2000 N
									250 0...5000 N
									310 0...10000 N
									Combined error
									B 0,3%
									Connection
									S80 4-pin connector series 712
									W24 Cable, 4-wire, open cable end



Dimensions (mm)

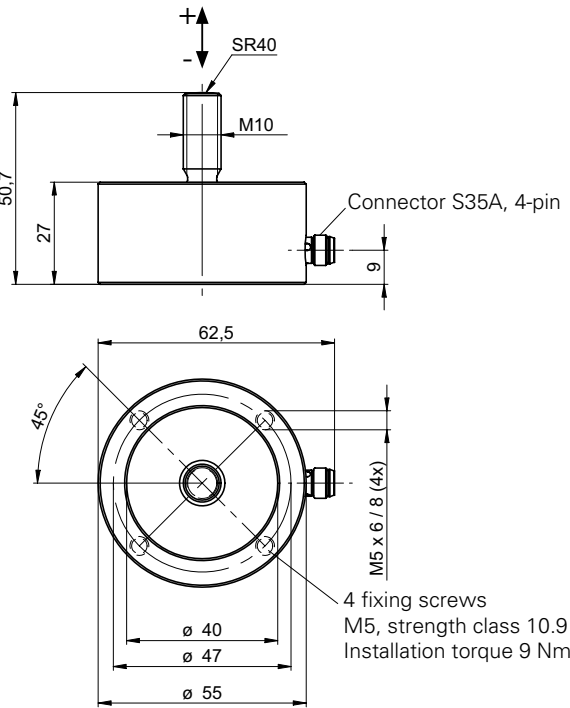


Electrical Connection

S80




Pin	
1	+Vs
2	-V _{OUT}
3	+V _{OUT}
4	GND
Housing	

W24



Color	Signal
brown	+Vs
black	-V _{OUT}
blue	GND
white	+V _{OUT}
Housing	

Bridge Circuit



Wiring

