


## Ultrasonic retro-reflective sensors

## URDK 09G8914/KS35A

## dimension drawing

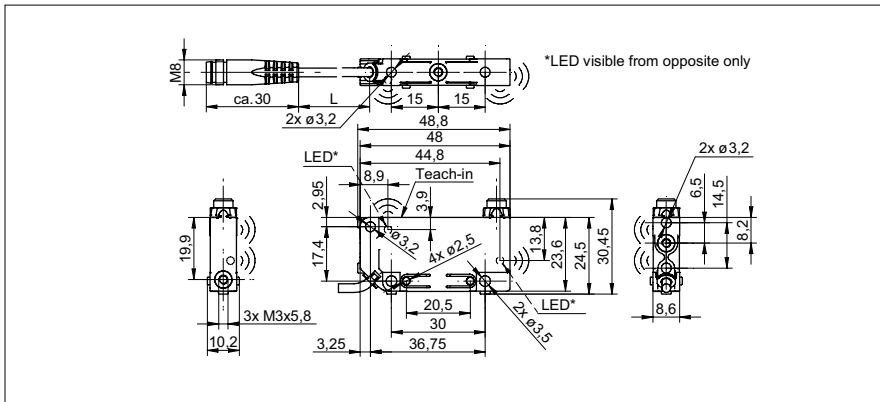

## general data

scanning range $s_d$	0 ... 200 mm
reflector position $S_{de}$	60 ... 200 mm
adjusting range reflector (operating range)	$\pm 2,5 \% S_{de}$
adjusting range reflector (limit range)	$\pm 5 \% S_{de}$
repeat accuracy	$< 1,5$ mm
temperature drift	$< 2 \% S_{de}$
response time $t_{on}$	$< 7$ ms
release time $t_{off}$	$< 7$ ms
sonic frequency	380 kHz
adjustment	Teach-in
alignment aid	target indication flashing
output indicator	green LED / red LED

## electrical data

voltage supply range $+V_s$	12 ... 30 VDC
current consumption max. (no load)	35 mA
output circuit	push-pull
output current	$< 100$ mA
voltage drop $V_d$	$< 2$ VDC
residual ripple	$< 10 \% V_s$
short circuit protection	yes
reverse polarity protection	yes

## mechanical data

type	rectangular
housing material	PA 12
width / diameter	8,6 mm
height / length	48,8 mm
depth	30,5 mm
connection types	flylead connector M8, L=200 mm

## ambient conditions

operating temperature	0 ... +60 °C
protection class	IP 67

## photo



## connection diagram

