


Copy counters

FLDM 180C1101/S42

dimension drawing

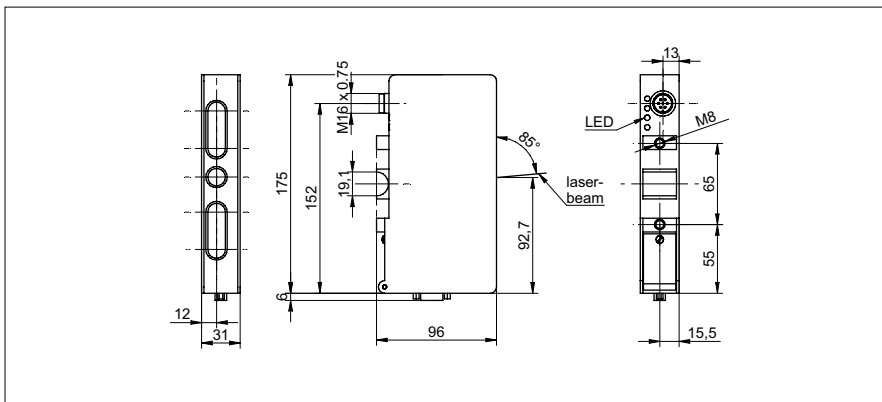

general data

measuring distance S_d	30 ... 50 mm
optimum operating distance	40 mm
object speed	< 2 m/sec
sensitivity	single sheet/edge thickness 5 mm
sync. input	yes
light source	pulsed infrared diode
edge indicator	LED orange
power on indication	LED green

electrical data

voltage supply range +Vs	19 ... 30 VDC
current consumption max. (no load)	200 mA
output circuit	opto isolated

mechanical data

width / diameter	31 mm
type	rectangular
housing material	aluminum / steel galvanized
connector base	Amphenol-Tuchel C91AT 3476 001,7 pin
front (optics)	glass

ambient conditions

operating temperature	10 ... +40 °C
-----------------------	---------------

photo



connection diagram

