


Overview

- M12, female, A-coded; 8-poles; TPE-S, 2500 cm, free cable end
- Dragchain capable; suitable for robotics $\pm 180^\circ/\text{m}$; suitable for food & beverage
- Head A: IP65, IP68, IP69K
- Halogen free



Technical data

Side A		Cables	
Head A: Connection	M12	Cable diameter	6.3 mm $\pm$ 5%
Head A: Angle cable outlet	0°	Wire cross section	0.25 mm ²
Head A: Gender	Female	Cable: Halogen free	Yes
Head A: Coding	A	Cable	
Head A: No. of poles	8	External sheath: Shore hardness	47 $\pm$ 5 D
Head A: LED	No	Cable: Temperature range (mobile)	- 25 ...+ 105 °C
Head A: Width across flats	AF14	Cable: Temperature range (fixed)	- 40 ...+ 105 °C
Head A: Tightening torque	0.6 Nm	Operating voltage (only UL listed)	30 V AC/DC
Head A: Knurled nut material	Stainless steel (V4A)	Shielded	No
Head A: Body color	Blue	Bending radius (fixed)	31.5 mm
Head A: Gasket material	EPDM	Number of wires	8
Labeling sleeve side A	No	Number and diameter of wires	8x0.25
Head A: Contact layout pin 1	WH	Length tolerance	$\pm$ 37.5 cm
Head A: Contact layout pin 2	BN	Cable length	2500 cm
Head A: Contact layout pin 3	GN	Acceleration (C-track)	max. 10 m/s ²
Head A: Contact layout pin 4	YE	AWG	24
Head A: Contact layout pin 5	GY	Bending radius (fixed)	min. 5 $\times$ outer diameter
Head A: Contact layout pin 6	PK	Torsion speed	max. 35 cycles/min
Head A: Contact layout pin 7	BU	Bending radius (mobile)	min. 10 $\times$ outer diameter
Head A: Contact layout pin 8	RD	Cable weight	approx. 46.2 g/m
Side B		Conductor structure	32 $\times$ 0.1 mm
Head B: Connection	Open-ended wires	Cable diameter	6.3 mm $\pm$ 5%
Labeling sleeve side B	No	Conductor: Material	Copper, bare
Cables		External sheath: Material	TPE-S
Cable length	2500 cm	Insulation: Material	PP
Length tolerance	$\pm$ 37.5 cm	No. of bending cycles (C-track)	approx. 4000000 Cycles
Stripping length	60 mm	Nominal voltage	300 V AC
Shielded	No	No. of torsion cycles	approx. 2000000 Cycles
Conductor structure	32 $\times$ 0.1 mm	Paired stranding	No
AWG	24	Single wire diameter	0.1 mm
External sheath: Material	TPE-S	Cable: Test voltage	3 kV
External sheath: Color	Blue	Torsion stress in °	$\pm$ 180 °/m
		Total stranding	8 wires strand around core-filler
		Travel speed (C-track)	max. 3 m/s

Technical data

Cable

Traversing path (horizontal)	max. 10 m
Wire cross section	0.25 mm ²
Wire processing	No
Wire diameter incl. isolation	1.17 mm ± 5%
External sheath: Color	Blue

Electrical data

Operating voltage	max. 30 V AC/DC 0
Operating voltage (only UL listed)	30 V AC/DC
Nominal voltage	300 V AC
Contact resistance	max. 30 mOhm
Operating current per contact	max. 2 A

Mechanical data

Head A: Degree of protection	IP65, IP68, IP69K
Bending radius (mobile)	min. 10 × outer diameter
Bending radius (fixed)	min. 5 × outer diameter
No. of bending cycles (C-track)	approx. 4000000 Cycles
Torsion speed	max. 35 cycles/min
Torsion stress in °	± 180 °/m
No. of torsion cycles	approx. 2000000 Cycles
Acceleration (C-track)	max. 10 m/s ²
Travel speed (C-track)	max. 3 m/s

Environmental conditions


Temperature range (mobile)	- 25 ...+ 105 °C
Temperature range (fixed)	- 25 ...+ 85 °C
Cable: Temperature range (fixed)	- 40 ...+ 105 °C
Dragchain capable	Yes
Head A: Chemical resistance	Chemical resistance tested according to ECOLAB. If other media are used, the material resistance must be tested according to the application.
Head A: Flame resistance	HB (UL 94)
Head A: Oil resistance	ASTM 1 oil, mineral oils, limited to hydraulic oils
Head A: Acid and alkali resistant	Chemical resistance tested according to ECOLAB. If other media are used, the material resistance must be tested according to the application.
Head A: Pollution degree	3
Cable: Acid and alkali resistant	Good (analogue FDA 21 178.3620, 178.3297, 177.1520, EU 10/2011)
Cable: Silicone-free	Yes
Cable: UV resistance	Yes

Commercial data

Eclass	27060311
--------	----------


Side A

Technical drawing

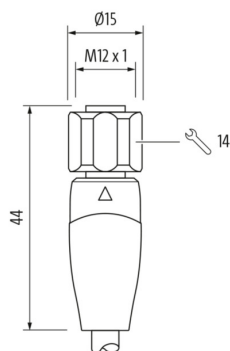


Side A

Coding




Side B

Technical drawing



Connection diagram

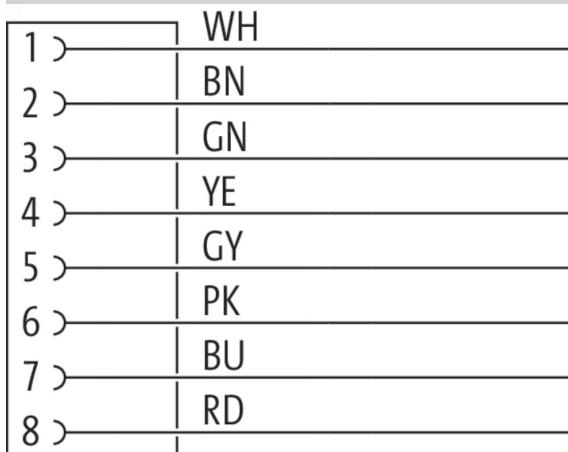

Dimension drawing

