FUF 200A1800

Article number: 11727056

Overview

Diffuse type
Sensing distance up to 200 mm
Threaded sensing head M8x1 thread
Metal jacket 200 cm long
Operating temperature up to +250 °C
For rugged fiber optic sensors FZAM 18 and FZAM 30




Picture similar

Technical data

General data	
Operating principle	Diffuse type
Sensing distance Tw	200 mm
Fiber optic head	Cylindrical threaded
Operating temperature	-25 … +250 °C
Exit angle	60°
Fiber optics can be shortened to length	No
Integrated lens	No
Adaptable lens	No
Infrared light compatibility (1450 nm)	Yes

Mechanical data	
Width / diameter (head)	8 mm
Height / length (head)	34 mm
Material (head)	Brass
Thread	M8 x 1
Bending radius (fixed)	20 mm
Bending radius (mobile)	36 mm
Cable jacket diameter	6 mm
Material cable jacket	Brass chromium plated
Fiber cross section	4 mm²
Material (fiber optic cable)	Glass
Length (fiber optic cable)	200 cm

Dimension drawing

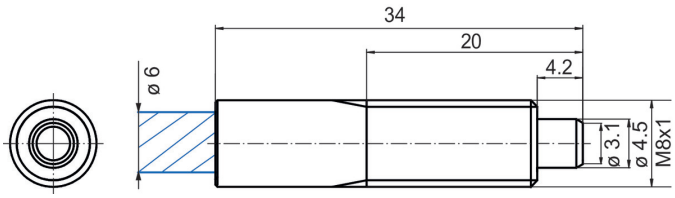

2025-05-13 The product features and technical data specified do not express or imply any warranty. Technical modifications subject to change.

FUF 200A1800

Article number: 11727056

Accessories

Fitting fiber optic sensors	
10129020	FZAM 18N1150
10129021	FZAM 18N1150/S14
10129023	FZAM 18N1155
10128874	FZAM 18N6460
10128875	FZAM 18N6460/S14
10127712	FZAM 18P1150
10128111	FZAM 18P1150/S14
10127711	FZAM 18P1155
10128118	FZAM 18P6460
10127710	FZAM 18P6460/S14
10215060	FZAM 30N5004
10214166	FZAM 30P5001
10215057	FZAM 30P5004

Mounting accessories	
10102757	Adapter series 30
10101958	Adjusting plate series 18
10101480	Replacements cap nut for fiber optics series 18
10102801	Cap nut for sensors series 30

Scope of delivery

1x fiber optic cable

2025-05-13 The product features and technical data specified do not express or imply any warranty. Technical modifications subject to change.