


## Inductive proximity switch

## IFRM 18N13G1/L

## dimension drawing



## general data

|                                |                               |
|--------------------------------|-------------------------------|
| mounting type                  | non-flush                     |
| special type                   | enhanced distance (GammaProx) |
| nominal sensing distance $S_n$ | 20 mm                         |
| hysteresis                     | 2 ... 25 % of $S_r$           |
| output indicator               | LED red                       |

## electrical data

|                                    |                        |
|------------------------------------|------------------------|
| switching frequency                | < 400 Hz               |
| voltage supply range +Vs           | 12 ... 30 VDC          |
| current consumption max. (no load) | 24 mA                  |
| output circuit                     | NPN make function (NO) |
| voltage drop $V_d$                 | < 2 VDC                |
| output current                     | < 200 mA               |
| short circuit protection           | yes                    |
| reverse polarity protection        | yes                    |

## mechanical data

|                         |                      |
|-------------------------|----------------------|
| type                    | cylindrical threaded |
| material (sensing face) | PBT                  |
| housing material        | brass nickel plated  |
| dimension               | 18 mm                |
| housing length          | 50 mm                |
| connection types        | cable, 2 m           |


## ambient conditions

|                       |              |
|-----------------------|--------------|
| operating temperature | 0 ... +60 °C |
| protection class      | IP 67        |

## photo



## connection diagram

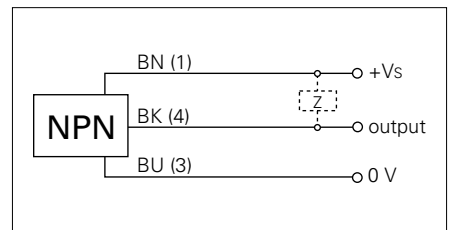

- increased sensing distance