


Inductive distance measuring sensors

IR18.D08L-11130478

dimension drawing



general data

mounting type	quasi-flush
measuring distance Sd	0 ... 8 mm
resolution	< 0,008 mm (stat.) < 0,01 mm (dynam.)
repeat accuracy	< 0,015 mm
adjustment	external Teach-in
linearity error	± 32 µm
temperature drift	± 3 %

electrical data

response time (factory characteristic)	< 1 ms
voltage supply range +Vs	12 ... 36 VDC
current consumption max. (no load)	15 mA
output circuit	voltage output / push-pull
output signal	0 ... 10 VDC
load resistance	> 4000 Ohm
short circuit protection	yes
reverse polarity protection	yes

mechanical data

type	cylindrical threaded
housing material	brass nickel plated
dimension	18 mm
housing length	60 mm
connection types	connector M12


ambient conditions

operating temperature	-25 ... +75 °C
protection class	IP 67

photo



connection diagram

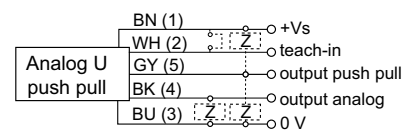

- external Teach-in
- Integrated Analog- and switching output
- Linear analog output