Baumer
Passion for Sensors

Inductive proximity switch

IR12.P06S.2-Q50.NO1Z.7BO

Article number: 11725120

Overview

- Cylindrical standard housing for versatile use
- Extended sensing distance for maximum reliability
- Lowest serial dispersion due to end-of-line calibration
- Robust even in demanding environments
- Temperature and long-term stable switching behavior



Picture similar

Technical data

General data	
Mounting type	Quasi-flush
Nominal sensing distance Sn	6 mm
Assured sensing distance Sa	≤ 81 % of Sn
Real sensing distance Sr	± 10 % von Sn
Temperature drift	± 10 % of Sr
Hysteresis	3 … 20 % of Sr
Output indicator	LED red
Correction factor typ.	Mild steel 100 %, stainless steel 70 %, aluminum 40 %, copper 35 %
Reference object	Fe360 18 x 18 x 1 mm
Electrical data	
Switching frequency	1 kHz
Voltage supply range +Vs	6 … 36 VDC
Current consumption max. (no load)	10 mA
Output circuit	NPN make function (NO)
Voltage drop Vd	<2 VDC
Output current	100 mA
Short circuit protection	Yes

Electrical data	
Reverse polarity protection	Yes
Mechanical data	
Design	Cylindrical threaded
Material (sensing face)	PBT
Housing material	Brass nickel plated
Dimension	12 mm
Housing length	50 mm
Connection types	Connector M12 4 pin
Tightening torque max.	10 Nm
Weight	28 g
Ambient conditions	
Operating temperature	-25 … +75 °C
Storage temperature	-40 … +75 °C
Protection class	IP 67
Vibration resistance	IEC 60068-2-6:2008 10 g at f = 10 - 2000 Hz, duration 150 min per axis
Shock resistance	IEC 60068-2-27:2009 100 g / 6 ms, 10 jolts per axis and direction
Safe maximum values	
MTTF	1265 years
Diagnostic coverage (DC)	0 %


2024-11-08 The product features and technical data specified do not express or imply any warranty. Technical modifications subject to change.

Inductive proximity switch


IR12.P06S.2-Q50.NO1Z.7BO

Article number: 11725120


Dimension drawing

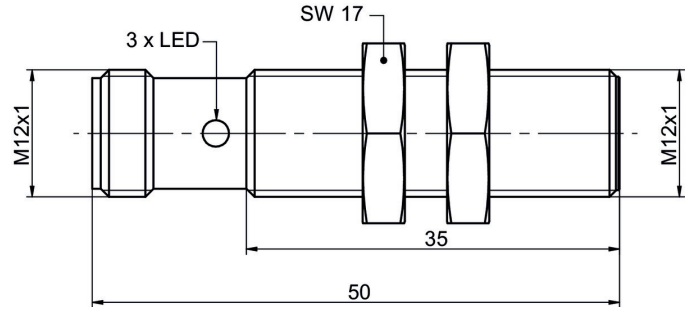


Connection diagram

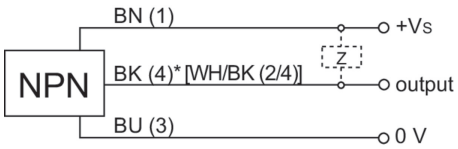

Pin assignment



Response diagram

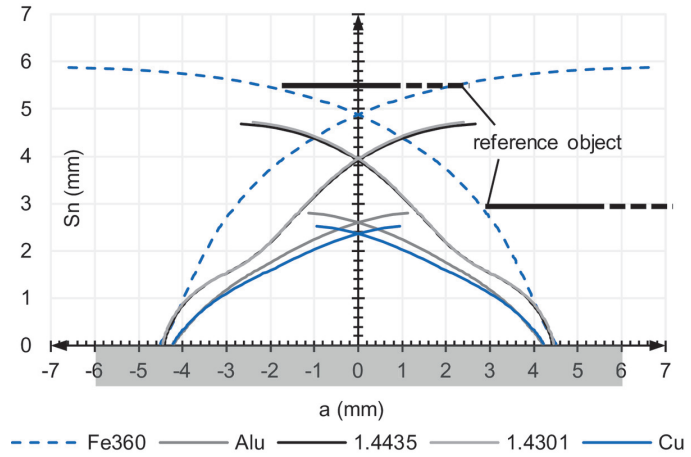

2024-11-08 The product features and technical data specified do not express or imply any warranty. Technical modifications subject to change.

IR12.P06S.2-Q50.NO1Z.7BO

Article number: 11725120

Accessories	
Mounting accessories	
10151720	Sensofix series 12 round
11707685	Mounting rod with mounting plate holder 200 mm
11707686	Mounting rod with mounting plate holder 300 mm
11707688	Mounting rod 200 mm
11707697	Mounting rod 250 mm
11707698	Mounting rod with mounting plate holder 250 mm
11707687	Mounting rod 300 mm
11707701	Mounting plate series 300 and ø12 mm
11707702	Mounting base
11707703	Two-way connector

2024-11-08 The product features and technical data specified do not express or imply any warranty. Technical modifications subject to change.