
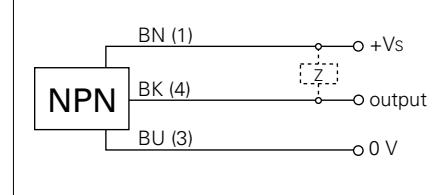


Inductive proximity switch**IFRM 12N13G3/L****dimension drawing****general data**

| | |
|-----------------------------|-------------------------------|
| mounting type | non-flush |
| special type | enhanced distance (GammaProx) |
| nominal sensing distance Sn | 10 mm |
| hysteresis | 2 ... 25 % of Sr |
| output indicator | LED red |

photo**electrical data**

| | |
|------------------------------------|------------------------|
| switching frequency | < 400 Hz |
| voltage supply range +Vs | 12 ... 30 VDC |
| current consumption max. (no load) | 24 mA |
| output circuit | NPN make function (NO) |
| voltage drop Vd | < 2 VDC |
| output current | < 200 mA |
| short circuit protection | yes |
| reverse polarity protection | yes |

connection diagram

- increased sensing distance

mechanical data

| | |
|-------------------------|----------------------|
| type | cylindrical threaded |
| material (sensing face) | PBT |
| housing material | brass nickel plated |
| dimension | 12 mm |
| housing length | 40 mm |
| connection types | cable, 2 m |

ambient conditions

| | |
|-----------------------|--------------|
| operating temperature | 0 ... +60 °C |
| protection class | IP 67 |